





Urethane springs for heavy loads - Type "B"

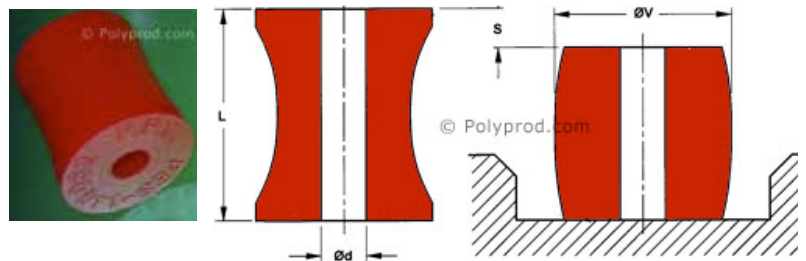

P.P.C. Part Nos.	Ød	ØD	L	S = 20% of L		S = 25% of L		S = 30% of L		ØV
				S	F(N)	S	F(N)	S	F(N)	
PBS-145062	14	50	62	12.4	7355	15.5	9200	18.6	12750	57
PBS-145082			82	16.4	6375	20.5	8600	24.6	12750	58
PBS-206062	20	60	62	12.4	9800	15.5	13240	18.6	19600	70
PBS-206082			82	16.4	9800	20.5	13140	24.6	17650	
PBS-208082	20	80	82	16.4	18600	20.5	25500	24.6	37260	92
PBS-2080103			103	20.6	19600	25.8	27450	24.6	61780	
PBS-2010082	20	100	82	16.4	30400	20.5	41180	24.6	61780	114
PBS-20100103			103	20.6	29400	25.8	41180	30.9	58800	
PBS-20100123			123	24.6	26480	30.8	36285	36.9	50000	

Urethane Spring Retainer

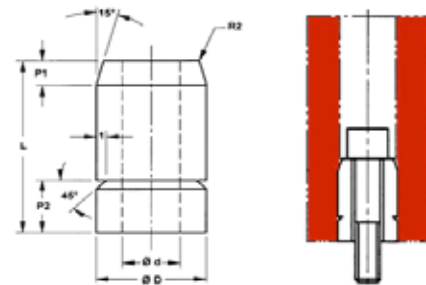

P.P.C. Part nos.	Ø D	Ø d	L	P1	P2	URETHANE SPRING			FASTENER
						I.D.	O.D.	LENGTH	
USR-1630	16	9	30	5	7	14	30 - 60	40 - 90	M8 x 50
USR-2435	24	13	35	5	10	22	40 - 110	60 - 200	M12 x 60