




PUDTs Poly-Dies with Molded Tang

- PUDs with Molded Tangs are available with:
American: 1/2" x 5/8" Tang
Amada, European: 60mm x 20mm
Trumpf: 13mm x 20mm
- Standard Length = 48"
- Capacity: 90A Red = 12 Ga. MS
95A Amber = 12 Ga. SS
75A Black = 10 Ga. SS
- Available in several deflections and durometers

95A - Amber	15% Deflection	Medium Hard
90A - Red	25% Deflection	Medium
80A - Green	35% Deflection	Medium Soft
70A - Blue	40% Deflection	Soft

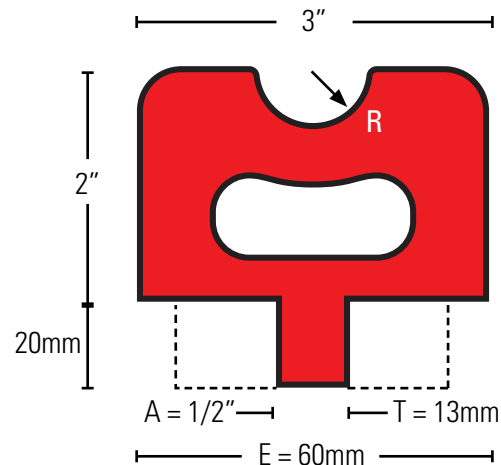

TYPE	PART NUMBER	BLOCK SIZE	RADIUS
American	PUD32A-25R	3"W x 2"H	1/4" (6.3mm)
	PUD32A-38R	3"W x 2"H	3/8" (9.5mm)
	PUD32A-50R	3"W x 2"H	1/2" (12.7mm)
	PUD32A-75R	3"W x 2"H	3/4" (19.0mm)
Amada or European	PUD32E-25R	3"W x 2"H - 75mm W x 50mm H	1/4" (6.3mm)
	PUD32E-38R	3"W x 2"H - 75mm W x 50mm H	3/8" (9.5mm)
	PUD32E-50R	3"W x 2"H - 75mm W x 50mm H	1/2" (12.7mm)
	PUD32E-75R	3"W x 2"H - 75mm W x 50mm H	3/4" (19.0mm)
TRUMPF	PUD32T-25R	3"W x 2"H - 75mm W x 50mm H	1/4" (6.3mm)
	PUD32T-38R	3"W x 2"H - 75mm W x 50mm H	3/8" (9.5mm)
	PUD32T-50R	3"W x 2"H - 75mm W x 50mm H	1/2" (12.7mm)
	PUD32T-75R	3"W x 2"H - 75mm W x 50mm H	3/4" (19.0mm)